





HIGH FLOW TUBES

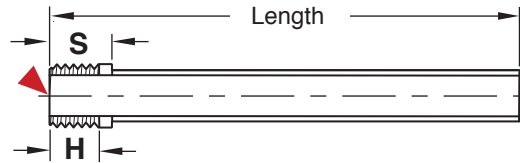

M Stainless Steel

Tube O.D.	Tube I.D.	Thread Size	H Thread Length	S Shoulder Length	12" Length	18" Length	24" Length	36" Length
.072	.060	#5-44	.125	.140	HFT078L12	HFT078L18	HFT078L24	HFT078L36
		#10-32	.156	.203	HFTJ078L12	HFTJ078L18	HFTJ078L24	HFTJ078L36
.090	.076	#5-44	.125	.140	HFT094L12	HFT094L18	HFT094L24	HFT094L36
		#10-32	.156	.203	HFTJ094L12	HFTJ094L18	HFTJ094L24	HFTJ094L36
.125	.109	#10-32	.156	.203	HFT125L12	HFT125L18	HFT125L24	HFT125L36
		1/4-28	.203	.255	HFTJ125L12	HFTJ125L18	HFTJ125L24	HFTJ125L36
.187	.167	1/4-28	.203	.255	HFT187L12	HFT187L18	HFT187L24	HFT187L36
		5/16-24	.235	.290	HFTJ187L12	HFTJ187L18	HFTJ187L24	HFTJ187L36
.250	.230	5/16-24	.235	.290	HFT250L12	HFT250L18	HFT250L24	HFT250L36
		3/8-24	.296	.359	HFTJ250L12	HFTJ250L18	HFTJ250L24	HFTJ250L36
.312	.288	3/8-24	.296	.359	HFT312L12	HFT312L18	HFT312L24	HFT312L36
		7/16-20	.359	.437	HFTJ312L12	HFTJ312L18	HFTJ312L24	HFTJ312L36
.365	.340	7/16-20	.359	.437	HFT375L12	HFT375L18	HFT375L24	HFT375L36
		1/2-20	.421	.500	HFTJ375L12	HFTJ375L18	HFTJ375L24	HFTJ375L36
.427	.397	1/2-20	.421	.500	HFT437L12	HFT437L18	HFT437L24	HFT437L36
		9/16-18	.421	.500	HFTJ437L12	HFTJ437L18	HFTJ437L24	HFTJ437L36
.500	.444	9/16-18	.421	.531	HFT500L12	HFT500L18	HFT500L24	HFT500L36
		5/8-18	.421	.531	HFTJ500L12	HFTJ500L18	HFTJ500L24	HFTJ500L36


High Flow tubes are for use with High Flow Cascade Heads, Compact Cascade Heads, Quick Coupling Cascade Heads and Hex Key Cascade Heads.

Tubes can be ordered cut to a specific length or provided in longer lengths.

To order, replace the length on any given catalog number with the desired length. Ex. HFT125L14.5

For special High Flow Tube configurations, refer to the templates in section X.

HEX SERIES TUBES

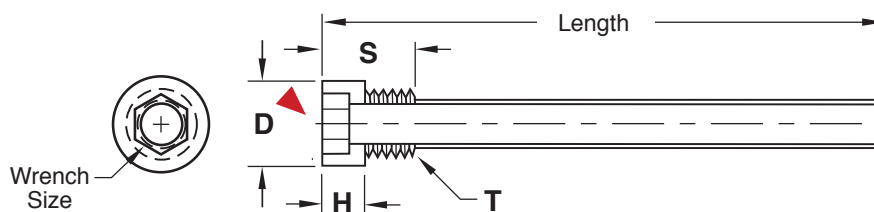

M Stainless Steel

CAD insertion point

Tube O.D.	Tube I.D.	T Thread	Wrench Size	S	D Diameter	H Head Height	12" Length	18" Length	24" Length	36" Length
.072	.060	#5-44	1/8	.312	.182	.156	HEXT078L12	HEXT078L18	HEXT078L24	HEXT078L36
		#10-32	1/8	.406	.245	.187	HEXTJ078L12	HEXTJ078L18	HEXTJ078L24	HEXTJ078L36
.090	.076	#5-44	1/8	.312	.182	.156	HEXT094L12	HEXT094L18	HEXT094L24	HEXT094L36
		#10-32	1/8	.406	.245	.187	HEXTJ094L12	HEXTJ094L18	HEXTJ094L24	HEXTJ094L36
.125	.109	#10-32	5/32	.406	.245	.187	HEXT125L12	HEXT125L18	HEXT125L24	HEXT125L36
		1/4-28	5/32	.406	.307	.250	HEXTJ125L12	HEXTJ125L18	HEXTJ125L24	HEXTJ125L36
.187	.167	1/4-28	3/16	.500	.307	.250	HEXT187L12	HEXT187L18	HEXT187L24	HEXT187L36
		5/16-24	1/4	.562	.370	.281	HEXTJ187L12	HEXTJ187L18	HEXTJ187L24	HEXTJ187L36
.250	.230	5/16-24	1/4	.562	.370	.281	HEXT250L12	HEXT250L18	HEXT250L24	HEXT250L36
		3/8-24	5/16	.625	.495	.312	HEXTJ250L12	HEXTJ250L18	HEXTJ250L24	HEXTJ250L36
.312	.288	3/8-24	5/16	.625	.495	.312	HEXT312L12	HEXT312L18	HEXT312L24	HEXT312L36
		1/2-20	3/8	.750	.620	.375	HEXTJ312L12	HEXTJ312L18	HEXTJ312L24	HEXTJ312L36

For special Hex Series Tube configurations, refer to the templates in section X.

Hex Series Tubes can be utilized with the Bubbler Tubes or in applications where installation in cores is required from the back as they are easily removed with the wrench hex.

Tubes can be ordered cut to a specific length or provided in longer lengths. To order, replace the length on any given catalog number with the desired length. Ex. HEXT125L14.5