
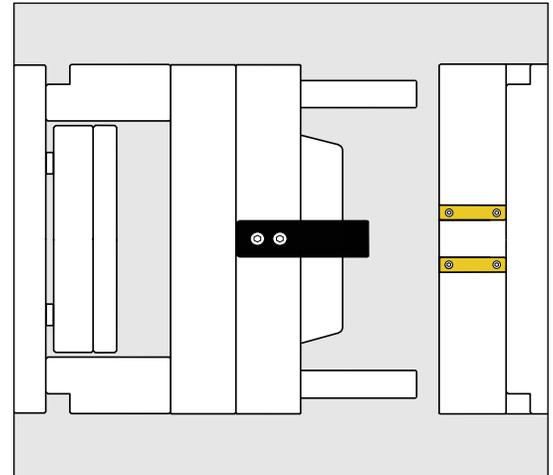


BAR LOCKS
BARS-SIDE MACHINE STYLE

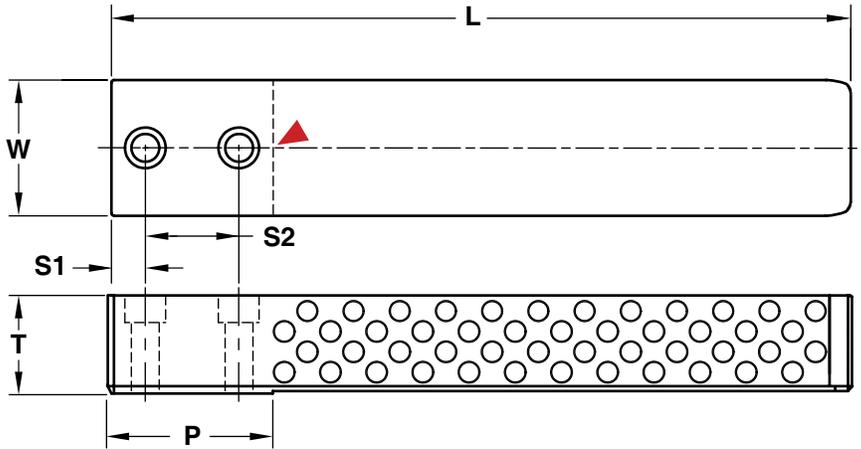

Inch Standard

M H-13 **H** Core: 42-48 HRC, Surface 70 HRC **S** Black Nitride

CAD insertion point

CATALOG NUMBER	L	T +.000 -.005	W +.0000 -.0005	P MINIMUM POCKET LENGTH	S1 ±.01	S2 ±.01	SHCS
BLB100L4	3.88	1.000	1.000	1.38	.38	.69	5/16-18 x 1-1/4
BLB100L6	6.00						
BLB125L5	4.88	1.250	1.500	1.88	.50	1.00	3/8 - 16 x 1-1/2
BLB125L9	8.88						
BLB137L6	5.88	1.375	2.000	2.38	.50	1.38	3/8 - 16 x 1-1/2
BLB137L11	10.88						
BLB150L8	7.88	1.500	3.000	3.38	.63	2.00	1/2 - 13 x 1-3/4
BLB150L16	15.88						

Bars are sold individually and include 2 screws.

Metric Standard

M H-13 **H** Core: 42-48 HRC, Surface 70 HRC **S** Black Nitride

CATALOG NUMBER	L	T +.0 -.1	W +.00 -.01	P MINIMUM POCKET LENGTH	S1 ±.25	S2 ±.25	SHCS
BLBM25L125	125	25	25	36	10	18	M8-1.25 x 30
BLBM32L160	160	32	38	46	12.5	25	M10-1.5 x 35
BLBM38L250	250	38	50	56	15	30	M12-1.75 x 45

Bars are sold individually and include 2 screws.

ALTERNATIVE CONFIGURATIONS AVAILABLE

- Guides are sold separately on page C-5.
- Bars can be cut to length and/or have radii machined. Refer to page C-7 for details.
- Made-to-order Bar Locks can be quoted using the templates at procomps.com.



BAR LOCKS


GUIDES-SIDE MACHINE STYLE

PW Tolerances:

Standard Bars:
+.0003/+.0006
(+.007/+.015mm)

Inserted Bars:
+.0010/+.0015
(+.025/+.038mm)

▶ CAD insertion point

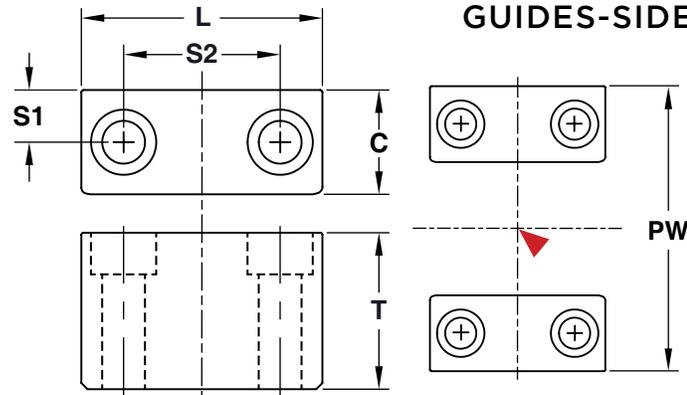

M D-2 **H** Core: 58-62 HRC, Surface 80 HRC **S** Titanium Nitride Coated

Inch Standard

CATALOG NUMBER	T +.000 -.005	L +.000 -.005	C +.0000 -.0003	S1 ±.01	S2 ±.01	PW	SHCS	USE WITH
BLG100L1.3	1.000	1.310	.500	.25	.75	2.000	#10-32 x 1-1/4	BLB100L4 & BLB100L6
BLG100L1.8		1.810			1.12			
BLG100L2.3		2.310			1.25			
BLG100L2.8		2.810			1.625			
BLG125L1.3	1.250	1.310	.625	.31	.75	2.750	1/4-20 x 1-1/2	BLB125L5 & BLB125L9
BLG125L1.8		1.810			1.12			
BLG125L2.3		2.310			1.25			
BLG125L2.8		2.810			1.62			
BLG137L1.8	1.375	1.810	.750	.37	1.12	3.500	5/16-18 x 1-1/2	BLB137L6 & BLB137L11
BLG137L2.3		2.310			1.25			
BLG137L2.8		2.810			1.62			
BLG137L3.3		3.310			2.25			
BLG137L3.8		3.810			2.50			
BLG150L1.8	1.500	1.810	1.000	.50	1.00	5.000 (6.000 for BLN150)	3/8-16 x 1-3/4	BLN150L8, BLB150L8, & BLB150L16
BLG150L2.3		2.310			1.50			
BLG150L2.8		2.810			1.62			
BLG150L3.3		3.310			2.25			
BLG150L3.8		3.810			2.50			
BLG250L4.3	2.500	4.310	1.250	.62	3.00	7.500	1/2-13 x 2-3/4	BLN250L10
BLG350L4.8	3.500	4.810	1.750	.87	3.25	9.500	5/8-11 x 3-3/4	BLN350L13

M D-2 **H** Core: 58-62 HRC, Surface 80 HRC **S** Titanium Nitride Coated

Metric Standard

CATALOG NUMBER	T +0 -1	L +0 -1	C +.000 -.007	S1 ±.25	S2 ±.25	PW	SHCS	USE WITH
BLGM25L27	25	27	12	6	14	49	M4-0.7 x 25	BLBM25L125
BLGM25L36		36			20			
BLGM32L36	32	36	16	8	20	70	M6-1.0 x 35	BLBM32L160
BLGM32L46		46			30			
BLGM38L46	38	46	22	11	24	94	M10-1.5 x 40	BLBM38L250
BLGM38L76		76			54			

ALTERNATIVE CONFIGURATIONS AVAILABLE


- Side Machine Bars are sold separately on page C-4. Inserted Bar Locks are sold on page C-9.
- Guides can have 2 or 4 radii machined. Refer to page C-7 for details.
- Made-to-order Guides can be quoted using the templates at procomps.com.

APPLICATION GUIDELINES


- Guides are sold in pairs. Each set includes 2 Guides and 4 Screws.
- Refer to page C-8 for application guidelines.

BAR LOCKS APPLICATIONS


Stripper Plate Application

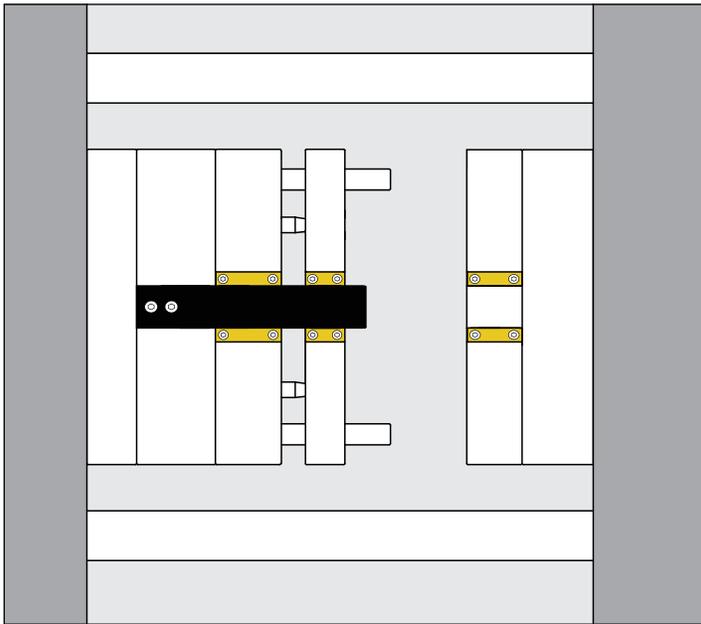


Three Plate Application

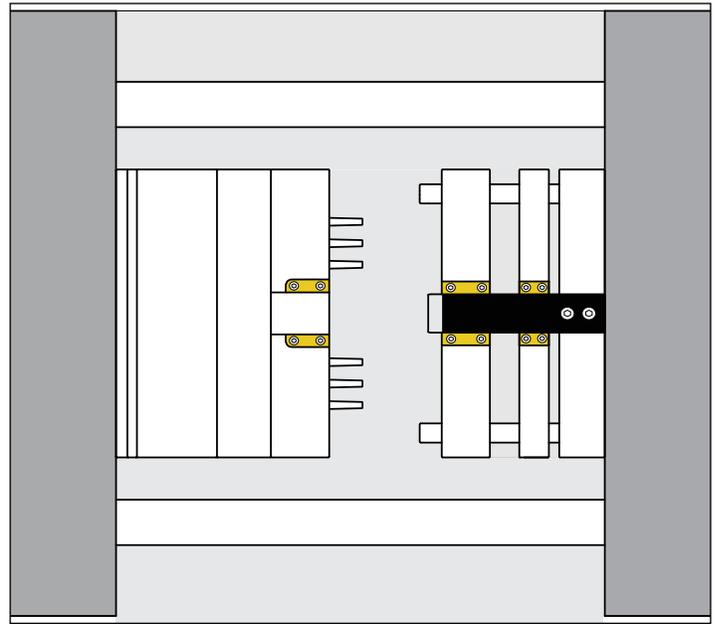




Stack Mold Application

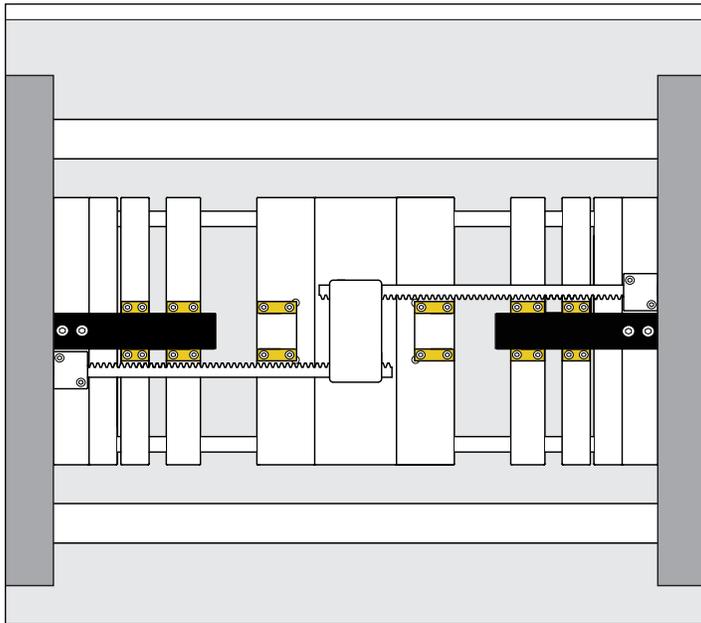

Floating Plate Application

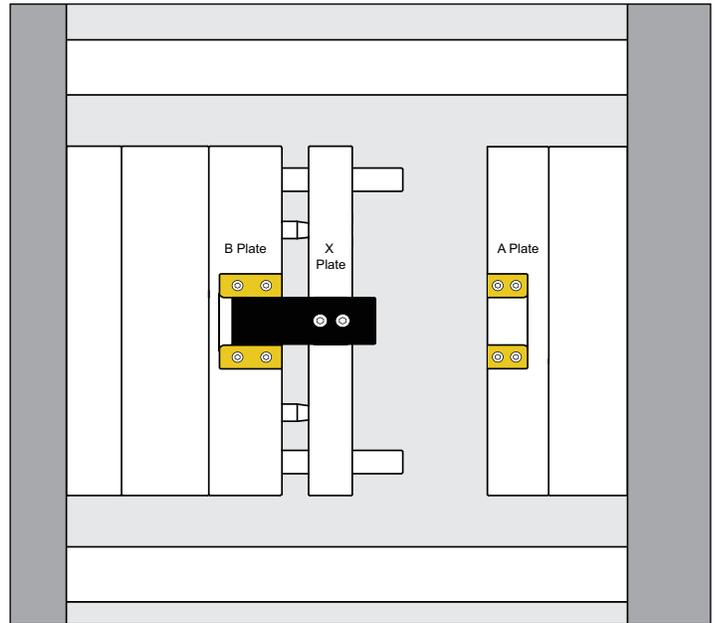

The minimum pocket length (P) is shown below in different applications.

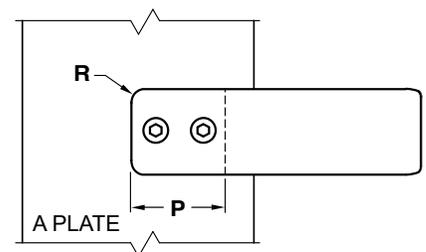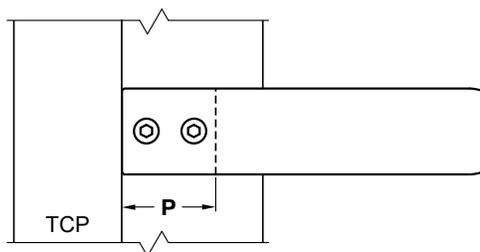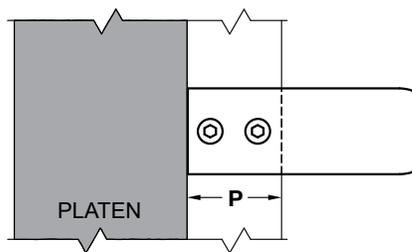



SIDE/TOP/GUIDE LOCK SELECTION GUIDE

Refer to the chart below to match the correct alignment lock for the corresponding mold size and weight of the B-Side and press platen, using four locks per mold. Clean and lubricate lock every 100,000 cycles, and prevent corrosion during mold storage.

RECOMMENDED MAX MOLD SIZE (LXWXH)	SIDE LOCKS	METRIC SIDE LOCKS	GUIDE LOCKS	TOP LOCKS	TOTAL MAX WEIGHT B SIDE + PRESS PLATEN (LBS/KG)
RTI AND MOLDS 8 X 8 X 8 AND SMALLER	SL37X100, SL50X125 SL50X150, SL50X200 SLS62X150, SLS62X200 SLR50X125, SLR50X150	SLM16X50, SLPM16X20 SLPM16X40, SLPM20X25 SLPM20X50, SLMS13X38 SLMS16X50	GL100X150 GLM25X45	TL75X75, TLM20X20 TL50X100, TL62X125 TL75X125, TLM26X35 TLR87X150	2,000 / 900
11 X 16 X 10	SL50X125, SL50X150 SL50X200, SLS62X150 SLS62X200, SLS75X300 SLS75X400, SLR50X150 SLR50X200	SLM16X50, SLMS19X75 SLPM25X32, SLPM25X63 SLPM32X40, SLPM32X80 SLPM40X50, SLPM40X100 SLMS19X100	GL100X150 GL150X250 GLM25X45	TL62X125, TL75X125 TL100X100, TLM25X25 TLM26X35 TLR87X150, TLR112X200	5,000 / 2,300
16 X 24 X 16	SL50X150, SL50X200 SL75X300, SLS112X500 SLS75X300, SLS75X400 SLR75X300, SLR100X400	SLM19X75, SLM19X100 SLMS25X125 SLPM50X56, SLPM50X112 SLRM32X63 SLRM40X100	GL150X250 GLM40X65	TL75X125, TL87X150 TL137X137, TLM32X32 TLM26X35, TLM30X45 TLR112X200 TLR150X250	7,000 / 3,200
28 X 34 X 24	SL75X300, SLS112X500	SLM19X75, SLM19X100	GL200X350 GL150X250 GLM40X65	TL100X150, TL100X200 TL112X200, TL112X300 TLM26X35, TLM30X45	10,000 / 4,500
32 X 40 X 28	SL100X400	SLM25X125	GL200X350 GLM40X65	TL112X200, TL112X300 TLM36X55, TLM36X75	15,000 / 6,800
42 X 48 X 34	SL125X500		GL250X450 GLM50X90	TL150X250, TL175X300 TLM36X55, TLM36X75	20,000 / 9,000
48 X 52 X 38	SL150X600		GL250X450	TL175X300, TL200X350 TLM45X100	26,000 / 11,800

BAR LOCK SELECTION GUIDE

MALE BAR CATALOG NUMBER	GUIDE CATALOG NUMBER	BAR LOCK ENGAGEMENT	TOTAL MAX WEIGHT SUPPORTED (LBS/KG)
BLB100L4	BLG100L1.3, BLG100L1.8 BLG100L2.3, BLG100L2.8	2.50	10,000 / 4,500
BLBX137L5	BLGT137L1.3, BLGT137L1.8	3.00	
BLB100L6	BLG100L1.3, BLG100L1.8 BLG100L2.3, BLG100L2.8	4.50	
BLBT137L6	BLGT137L1.3, BLGT137L1.8		
BLBM25L125	BLGM25L27, BLGM25L36	89mm	15,000 / 6,800
BLB125L5	BLG125L1.3, BLG125L1.8 BLG125L2.3, BLG125L2.8	3.00	
BLBX162L6	BLGT162L1.3, BLGT162L2.3	3.50	
BLB125L9	BLG125L1.3, BLG125L1.8 BLG125L2.3, BLG125L2.8	7.00	
BLBT162L9	BLGT162L1.3, BLGT162L2.3		
BLBM32L160	BLGM32L36, BLGM32L46	114mm	
BLB137L6	BLG137L1.8, BLG137L2.3 BLG137L2.8, BLG137L3.3, BLG137L3.8	3.50	20,000 / 9,000
BLBX200L7	BLGT200L1.8 & BLGT200L2.8	4.50	
BLB137L11	BLG137L1.8, BLG137L2.3 BLG137L2.8, BLG137L3.3, BLG137L3.8	8.50	
BLBT200L11	BLGT200L1.8 & BLGT200L2.8		26,000 / 11,800
BLBM38L250	BLGM38L46, BLGM38L76	194 mm	
BLB150L8	BLG150L1.8, BLG150L2.3	4.50	
BLB150L16	BLG150L2.8, BLG150L3.3, BLG150L3.8	12.50	
BLN150L8	BLG150L1.8, BLG150L2.3 BLG150L2.8, BLG150L3.3, BLG150L3.8	3.75	
BLN250L10	BLG250L4.3	5.00	50,000 / 22,500
BLN350L13	BLG350L4.8	6.00	75,000 / 34,000