





DATE STAMPS 20 SERIES: 20MM LENGTH

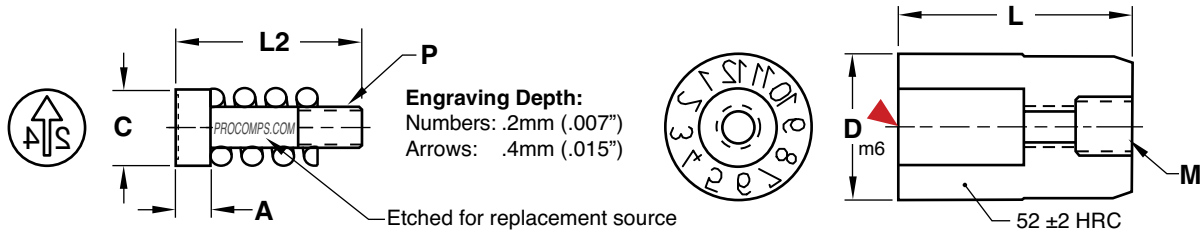

PLUGS

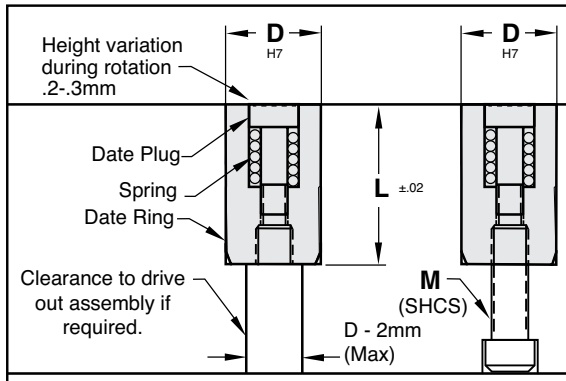

M 420 Stainless (1.4034) **H** 50-54 HRC

CATALOG NUMBER	C	A	L2	P	ARROW ONLY
DLP06-24	3.1	3.0	13	M1.6x0.20	DLP06-AO
DLP08-24	4.6	4.0	14	M2.5x0.35	DLP08-AO
DLP10-24	4.6	4.0	14	M2.5x0.35	DLP10-AO
DLP16-24	8.2	3.5	14	M4x0.35	DLP16-AO

RINGS



▶ CAD insertion point

CATALOG NUMBER	D	M	L
DL06	6	M3x0.5	20
DL08	8	M4x0.7	
DL10	10	M5x0.8	
DL16	16	M8x1.25	


APPLICATION GUIDELINES

- Maximum mold temperature: 285°F (140°C)

To Order:

- For other date plugs, modify catalog number for the year required. Example: DLP06-25.
- Plugs include springs and replacements are available.
- Special configurations are available. Contact Customer Service for more information.

D SERIES: DEEP ENGRAVING

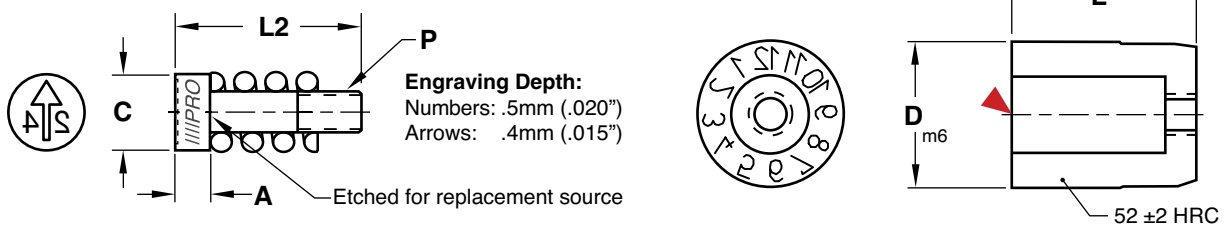

PLUGS

M 420 Stainless (1.4034) **H** 50-54 HRC

CATALOG NUMBER	C	A	L2	P	ARROW ONLY
DCP10D-24	5.2	3.0	12	M2.5x0.35	DCP10-AO
DCP12D-24	6.2	3.0	14	M3x0.35	DCP12-AO
DCP16D-24	8.2	3.5	14	M4x0.35	DCP16-AO
DCP20D-24	11.0	4.5	16	M4x0.35	DCP20-AO

▶ CAD insertion point

CATALOG NUMBER	D	L
DC10-D	10	12
DC12-D	12	14
DC16-D	16	14
DC20-D	20	16

To Order:

- For other date plugs, modify catalog number for the year required. Example: DCP16D-25.
- Plugs include springs and replacements are available.
- Special configurations are available. Contact Customer Service for more information.

APPLICATION GUIDELINES

- Maximum mold temperature: 285°F (140°C)