


DATE STAMPS

CH SERIES: COMPACT HEIGHT

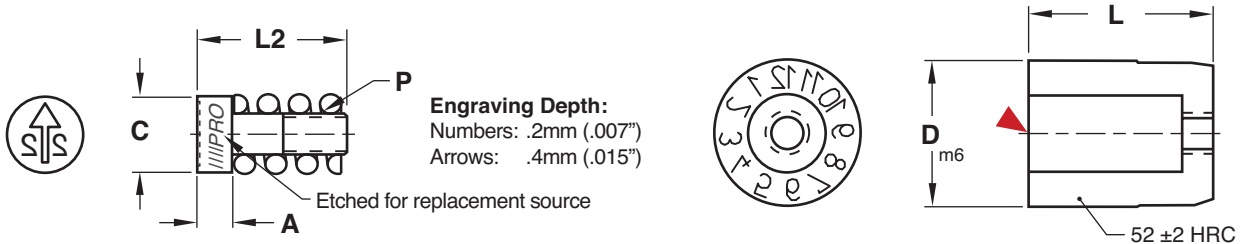

Engraving Depth:
 Numbers: .2mm (.007")
 Arrows: .4mm (.015")

PLUGS



M 420 Stainless (1.4034) **H** 54-58 HRC

CATALOG NUMBER	C	A	L2	P
DCP04-22	2.2	2.0	8	M1x0.25
DCP05-22	3.1	2.0	8	M1.6x0.20
DCP06-22	3.1	2.0	8	M1.6x0.20
DCP08-22	4.4	2.5	10	M2.3x0.25
DCP10-22	5.2	3.0	12	M2.5x0.35
DCP12-22	6.2	3.0	14	M3x0.35
DCP16-22	8.2	3.5	14	M4x0.35
DCP20-22	11.0	4.5	16	M4x0.35

RINGS





CATALOG NUMBER	D	L	B From Graphic Below
DC04	4	8	1.4
DC05	5	8	2
DC06	6	8	2
DC08	8	10	3
DC10	10	12	3
DC12	12	14	4
DC16	16	14	5
DC20	20	16	5

▶ CAD insertion point


Additional Plug and Ring Options: Specify catalog number as shown below for the different style plugs and rings.


Plug Styles: Recessed Lettering


 **Arrow Only**
 Cat #: DCP-Diam-AO
 Ex.: DCP05-AO


 **C**
 Cat #: DCP-Diam-C
 Ex.: DCP05-C


Ring Styles: Recessed Lettering


 **0 - 9**
 Cat #: DCN-Diam
 Ex.: DCN05

 **A - M**
 Cat #: DCA-Diam
 Ex.: DCA05


 **Blank**
 Cat #: DC-Diam-B
 Ex.: DC05-B


 **N - Z**
 Cat #: DCZ-Diam
 Ex.: DCZ05


 **Days**
 Cat #: DCL-Diam
 Ex.: DCL05

 **Years**
 Cat #: DCY-Diam-Starting Year*
 Ex.: DCY05-22

Note: The DCL04 and DCL05 does not have tick marks.


 **Quarters**
 Cat #: DCQ-Diam
 Ex.: DCQ05

 **Shifts**
 Cat #: DCS-Diam
 Ex.: DCS05

 **Weeks**
 Cat #: DCW-Diam
 Ex.: DCW05

*Where years are specified, any year can be ordered by changing the suffix.
 Ex: DCP05-23 or DCY05-24.

Installation Guidelines:

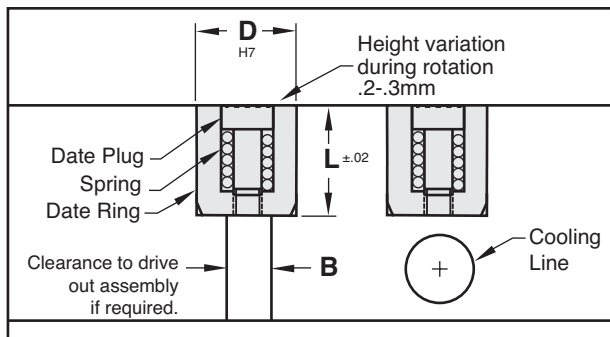

Maximum mold temperature: 285° F (140° C)

Use both the Weeks Ring (DCW) and 0-9 Ring (DCN) to designate specific weeks of the year. Special configurations are available. Plugs include springs and replacements are available.