



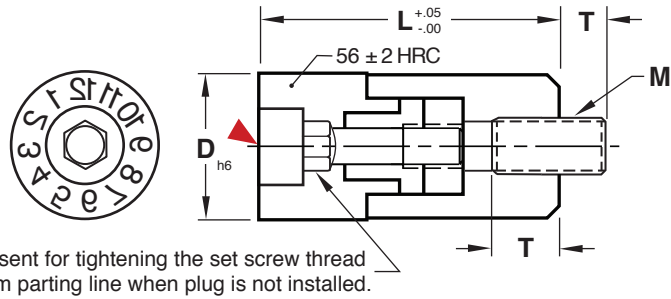

DATE STAMPS

LOCKING DETENT SERIES

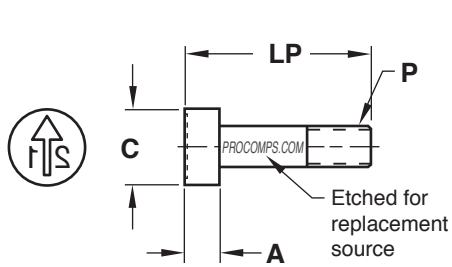

PLUGS



RINGS



M 420 Stainless (1.4034) **H** 54-58 HRC

CATALOG NUMBER	C	A	LP	P	Engraving Depth (Arrow)
DNP04-21	2.5	2.3	10.5	M1.4 x 0.2	.30
DNP05-21	3.1	2.8	13.0	M1.6 x 0.2	.40
DNP06-21	3.1	2.8	13.0	M1.6 x 0.2	.40
DNP08-21	4.6	4.0	14.0	M2.5 x 0.35	.40
DNP10-21	4.6	4.0	14.0	M2.5 x 0.35	.40
DNP12-21	6.4	4.0	17.0	M3 x 0.5	.60
DNP16-21	8.4	5.0	23.0	M3.5 x 0.6	.60

CATALOG NUMBER	D	L	M	T	Engraving Depth
DN04	4	14	M2 x 0.4	3	.10
DN05	5	17	M3 x 0.5	3	.20
DN06	6	17	M3 x 0.5	3	.20
DN08	8	20	M4 x 0.7	4	.20
DN10	10	20	M5 x 0.8	4	.20
DN12	12	25	M6 x 1.0	6	.25
DN16	16	33	M8 x 1.25	8	.25

▶ CAD insertion point

Additional Plug and Ring Options: Specify catalog number as shown below for the different style plugs and rings.

Plug Styles: Recessed Lettering

Arrow Only
 Cat #: DNP-Diam-AO
 Ex.: DNP05-AO

C
 Cat #: DNP-Diam-C
 Ex.: DNP05-C

Ring Styles: Recessed Lettering

0 - 9
 Cat #: DNN-Diam
 Ex.: DNN05

A - L
 Cat #: DNA-Diam
 Ex.: DNA05

0 - 30
 Cat #: DNT-Diam
 Ex.: DNT05


M - X
 Cat #: DNZ-Diam
 Ex.: DNZ05

Blank
 Cat #: DN-Diam-B
 Ex.: DN05-B

Years
 Cat #: DNY-Diam-Starting Year*
 Ex.: DNY05-21

Installation Guidelines:

Ring can be installed using the included set screw or retained with a screw from the back.

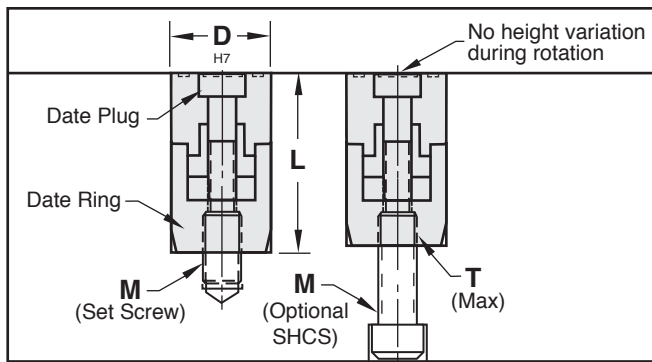

Maximum mold temperature: 450° F (230° C)

*Where years are specified, any year can be ordered by changing the suffix. Example DNP05-22 or DNY05-23.

To create Date Stamps for days, purchase both the 0-30 ring (DNT) and the 0-9 ring (DNN) and the desired plugs.

Special configurations are available. Contact Customer Service for more information.