






DATE STAMPS LOCKING DETENT SERIES

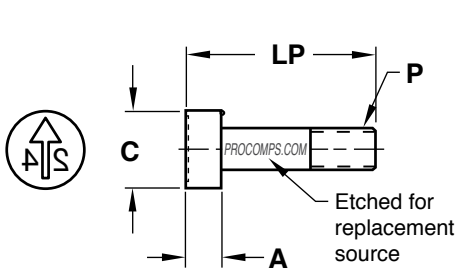

Hex is present for tightening the set screw thread from parting line when plug is not installed.

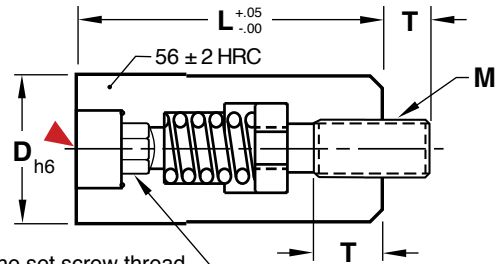

PLUGS



RINGS




M 420 Stainless (1.4034) **H** 54-58 HRC

▶ CAD insertion point

CATALOG NUMBER	C	A	LP	P	ENGRAVING DEPTH (ARROW)
DNP03-24	1.6	2.2	9.0	M1 x 0.25	.20
DNP04-24	2.5	2.3	10.5	M1.4 x 0.2	.30
DNP05-24	3.1	2.8	13.0	M1.6 x 0.2	.40
DNP06-24	3.1	2.8	13.0	M1.6 x 0.2	.40
DNP08-24	4.6	4.0	14.0	M2.5 x 0.35	.40
DNP10-24	4.6	4.0	14.0	M2.5 x 0.35	.40
DNP12-24	6.4	4.0	17.0	M3 x 0.5	.60
DNP16-24	8.4	5.0	23.0	M3.5 x 0.6	.60

CATALOG NUMBER	D	L	M	T	ENGRAVING DEPTH
DN03	3	14	M2 x 0.4	3	.10
DN04	4	14	M2 x 0.4	3	.10
DN05	5	17	M3 x 0.5	3	.20
DN06	6	17	M3 x 0.5	3	.20
DN08	8	20	M4 x 0.7	4	.20
DN10	10	20	M5 x 0.8	4	.20
DN12	12	25	M6 x 1.0	6	.25
DN16	16	33	M8 x 1.25	8	.25

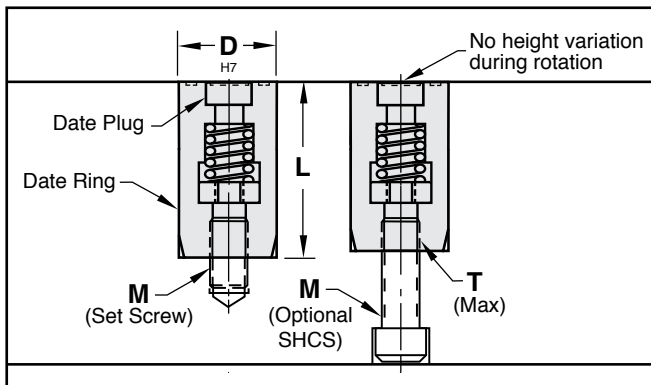

To Order:

- Specify catalog number as shown above and below for the different style plugs and rings.
- Where years are specified (*), any year can be ordered by changing the suffix. Example: DNP05-25 or DNY05-26.
- To create Date Stamps for days, purchase both the 0-30 ring (DNT) and the 0-9 ring (DNN) and the desired plugs.
- Special configurations are available. Contact Customer Service for more information.

Plug Styles: Recessed Lettering



Arrow Only

Cat #: DNP-Diam-AO
Ex.: DNP05-AO



C

Cat #: DNP-Diam-C
Ex.: DNP05-C

Ring Styles: Recessed Lettering



0 - 9

Cat #: DNN-Diam
Ex.: DNN05



A - L

Cat #: DNA-Diam
Ex.: DNA05



0 - 30

Cat #: DNT-Diam
Ex.: DNT05



M - X

Cat #: DNZ-Diam
Ex.: DNZ05



Blank

Cat #: DN-Diam-B
Ex.: DN05-B



Years

Cat #: DNY-Diam-Starting Year*
Ex.: DNY05-24

APPLICATION GUIDELINES

- Ring can be installed using the included set screw or retained with a screw from the back.
- Maximum mold temperature:
 - Ø3-Ø4mm: 662°F (350°C)
 - Ø5-Ø16mm: 932°F (500°C)