



DATE STAMPS

LOCKING MULTI-DATERS

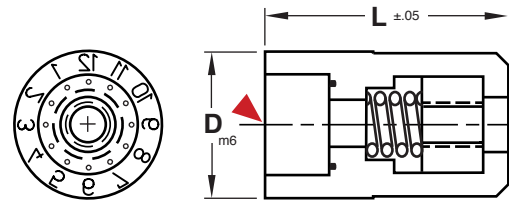

PLUGS

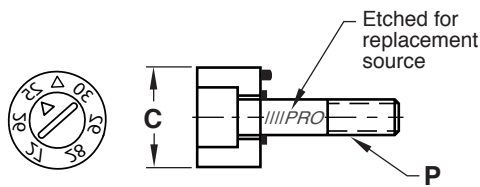

M 420 Stainless (1.4034) **H** 54-58 HRC

CATALOG NUMBER	C	SLOT DEPTH	P	ENGRAVING DEPTH (ARROW)
DMDLKP06-256	4.2	0.4	M1.6x0.2	0.10
DMDLKP08-256	5.8	0.4	M2.5x0.25	0.10
DMDLKP10-256	7.0	0.4	M2.5x0.35	0.10
DMDLKP12-256	8.5	0.6	M3.0x0.35	0.20
DMDLKP16-256	11.5	0.6	M4.0x0.35	0.25
DMDLKP20-256	14.0	0.6	M4.0x0.35	0.25

RINGS



► CAD insertion point

CATALOG NUMBER	D	L	K	ENGRAVING DEPTH
DMDLK06	6	10	3.2	0.10
DMDLK08	8	10	5.2	0.12
DMDLK10	10	12	6.2	0.13
DMDLK12	12	14	7.2	0.20
DMDLK16	16	14	8.2	0.25
DMDLK20	20	16	10.2	0.60



Arrow & 6 Years Plug Assembly
Featured in the table above.



Months ring style is featured in the table above.



Arrow & 11 Years Plug Assembly
Cat #:DMDLKP-Diam-Starting Year*-11
Ex.: DMDLKP06-2511

To Order:

- Specify catalog number as shown above or below for the different style plugs.
- Where years are specified (*), any year can be ordered by changing the suffix. Example: DMDLKP10-266 or DMDLKP06-2711.

APPLICATION GUIDELINES

- Maximum mold temperature: 450°F (230°C)

