




EJECTOR PINS

SS SERIES: SHOULDER INCH STANDARD

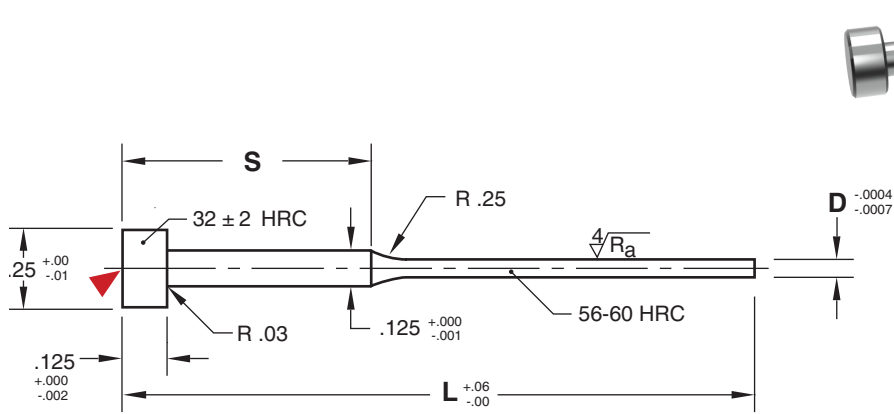

M 440C **H** 56-60 HRC

▶ CAD insertion point

D NOMINAL DIAMETER	S SHOULDER LENGTH	L=6"	L=10"
1/32	2	EPSS031L6-20	EPSS031L10-20
3/64	1/2	EPSS047L6-05	—
	2	EPSS047L6-20	EPSS047L10-20
1/16	3	—	EPSS047L10-30
	1/2	EPSS062L6-05	—
	2	EPSS062L6-20	EPSS062L10-20
5/64	3	—	EPSS062L10-30
	1/2	EPSS078L6-05	—
	2	EPSS078L6-20	EPSS078L10-20
3/32	3	—	EPSS078L10-30
	1/2	EPSS094L6-05	—
	2	EPSS094L6-20	EPSS094L10-20
7/64	3	—	EPSS094L10-30
	2	—	EPSS109L10-20

ALTERNATIVE CONFIGURATIONS AVAILABLE

- To order pins with the keys tangent to the diameter, add "-K" to the end of the catalog number. Ex. EPSS094L6-05-K.
- Mold-Ready Ejector Pins can be supplied cut-to-length, keyed, and/or engraved or with Black Nitride. Refer to page A-26 and procomps.com/mrc for more information.
- Made-to-Order Pins can be quoted using the templates at procomps.com.