




EJECTOR PINS

THROUGH-HARD PINS: SHOULDER-INCH STANDARD

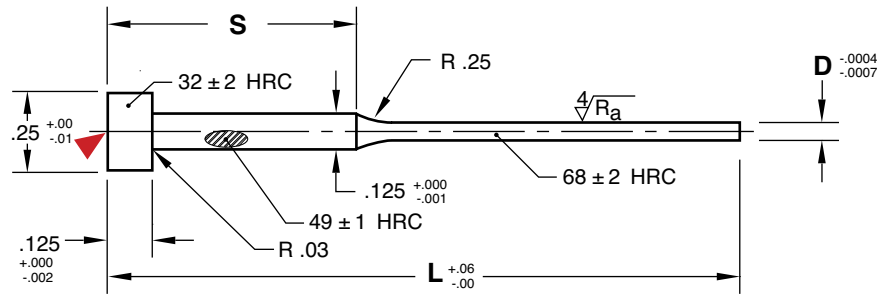

M H-13 **H** Core: 48-50 HRC, Surface: 66-70 HRC

▶ CAD insertion point

| D NOMINAL DIAMETER | S SHOULDER LENGTH | L=6" | | L=10" | | L=14" | |
|--------------------------|-------------------------|---------------|-----------------------|---------------|-----------------------|---------------|-----------------------|
| | | D STANDARD | D .005 OVERSIZE | D STANDARD | D .005 OVERSIZE | D STANDARD | D .005 OVERSIZE |
| 1/32 | 1/2 | EP031L6-05 | EP036L6-05 | — | — | — | — |
| | 2 | EP031L6-20 | — | EP031L10-20 | EP036L10-20 | — | — |
| | 3 | EP031L6-30 | — | — | — | — | — |
| | 4 | EP031L6-40 | — | — | — | — | — |
| 3/64 | 1/2 | EP047L6-05 | — | EP047L10-05 | EP052L10-05 | — | — |
| | 2 | EP047L6-20 | — | EP047L10-20 | EP052L10-20 | EP047L14-20 | — |
| | 3 | — | — | EP047L10-30 | — | — | — |
| | 4 | — | — | EP047L10-40 | EP052L10-40 | EP047L14-40 | EP052L14-40 |
| 1/16 | 1/2 | EP062L6-05 | — | EP062L10-05 | EP067L10-05 | — | — |
| | 2 | EP062L6-20 | — | EP062L10-20 | EP067L10-20 | EP062L14-20 | — |
| | 3 | — | — | EP062L10-30 | — | — | — |
| | 4 | — | — | EP062L10-40 | EP067L10-40 | EP062L14-40 | EP067L14-40 |
| 5/64 | 1/2 | EP078L6-05 | — | EP078L10-05 | EP083L10-05 | — | — |
| | 2 | EP078L6-20 | — | EP078L10-20 | EP083L10-20 | EP078L14-20 | — |
| | 3 | — | — | EP078L10-30 | — | — | — |
| | 4 | — | — | EP078L10-40 | EP083L10-40 | EP078L14-40 | EP083L14-40 |
| 3/32 | 1/2 | EP094L6-05 | — | EP094L10-05 | EP099L10-05 | — | — |
| | 2 | EP094L6-20 | — | EP094L10-20 | EP099L10-20 | EP094L14-20 | — |
| | 3 | — | — | EP094L10-30 | — | — | — |
| | 4 | — | — | EP094L10-40 | EP099L10-40 | EP094L14-40 | EP099L14-40 |
| 7/64 | 1/2 | EP109L6-05 | — | EP109L10-05 | EP114L10-05 | — | — |
| | 2 | EP109L6-20 | — | EP109L10-20 | EP114L10-20 | EP109L14-20 | — |
| | 3 | — | — | EP109L10-30 | — | — | — |
| | 4 | — | — | EP109L10-40 | EP114L10-40 | EP109L14-40 | EP114L14-40 |

ALTERNATIVE CONFIGURATIONS AVAILABLE

- To order pins with the keys tangent to the diameter, add "-K" to the end of the catalog number. Ex. EP094L6-05-K.
- Mold-Ready Ejector Pins can be supplied cut-to-length, keyed, and/or engraved or with Black Nitride. Refer to page A-22 and procomps.com/mold-ready for more information.
- Made-to-order Pins can be quoted using the templates at procomps.com.