


**EJECTOR PINS**  
SS SERIES: STRAIGHT INCH STANDARD

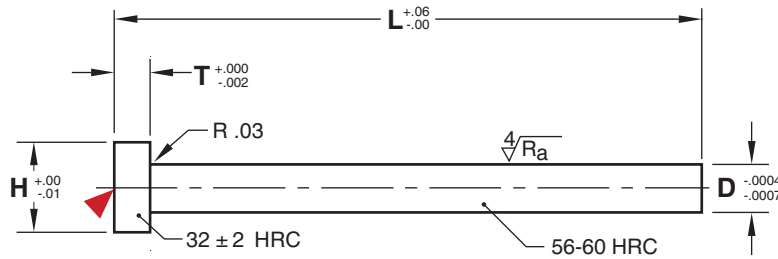

**M** 440C **H** 56-60 HRC

CAD insertion point

D NOMINAL DIAMETER	H	T	L=3"	L=6"	L=10"	L=14"	L=18"
1/8	.25	.125	EPSS125L3	EPSS125L6	EPSS125L10	—	—
9/64	.25	.125	—	EPSS141L6	—	—	—
5/32	.28	.156	EPSS156L3	EPSS156L6	EPSS156L10	—	—
3/16	.37	.187	EPSS187L3	EPSS187L6	EPSS187L10	EPSS187L14	—
7/32	.40	.187	EPSS219L3	EPSS219L6	EPSS219L10	—	—
1/4	.43	.187	EPSS250L3	EPSS250L6	EPSS250L10	EPSS250L14	EPSS250L18
9/32	.43	.250	—	EPSS281L6	EPSS281L10	—	—
5/16	.50	.250	—	EPSS312L6	EPSS312L10	EPSS312L14	EPSS312L18
3/8	.62	.250	—	EPSS375L6	EPSS375L10	EPSS375L14	EPSS375L18
1/2	.75	.250	—	—	EPSS500L10	EPSS500L14	—
5/8	.87	.250	—	—	EPSS625L10	EPSS625L14	—
3/4	1.00	.250	—	—	EPSS750L10	EPSS750L14	—

**APPLICATION GUIDELINES**

- Tolerance by head is +000/-0.001 a maximum of .25" for 3" long pins and 1" for 6" and longer pins.

**ALTERNATIVE CONFIGURATIONS AVAILABLE**

- To order pins with the keys tangent to the diameter, add "-K" to the end of the catalog number. Ex. EPSS250L10-K.
- Mold-Ready Ejector Pins can be supplied cut-to-length, keyed, and/or engraved or with Black Nitride. Refer to page A-26 and [procomps.com/mrc](http://procomps.com/mrc) for more information.
- Made-to-Order Pins can be quoted using the templates at [procomps.com](http://procomps.com).