



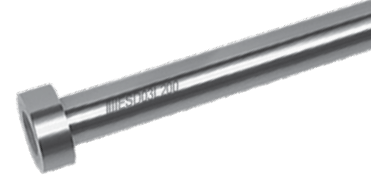

EJECTOR SLEEVES

METRIC DIN STANDARD

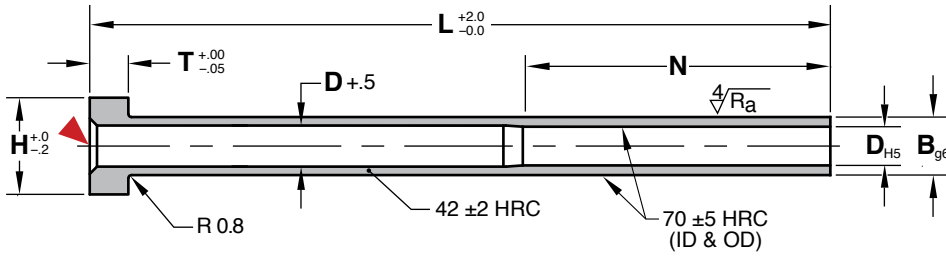

General Dimensions:		T=3mm for ESD015 thru ESD032
N=35mm for ESD015 thru ESD025		T=5mm for ESD035 thru ESD062
N=45mm for ESD027 thru ESD10		T=7mm for ESD08 thru ESD125
N=55mm for ESD102 and larger		T=9mm for ESD14 and larger

M H-13 **H** Core: 40-44 HRC, Surface: 65-75 HRC

▶ CAD insertion point

CATALOG NUMBER	D	B	H	LENGTHS (L)												
				75MM	100MM	125MM	150MM	175MM	200MM	225MM	250MM	275MM	300MM	325MM	350MM	400MM
ESD015	1.5	3	6		.	.	.									
ESD016	1.6	3	6		.	.	.									
ESD02	2	4	8								
ESD022	2.2	4	8								
ESD025	2.5	5	10						
ESD027	2.7	5	10						
ESD03	3	5	10
ESD032	3.2	5	10						
ESD035	3.5	6	12					
ESD037	3.7	6	12					
ESD04	4	6	12				
ESD042	4.2	8	14				
ESD05	5	8	14
ESD052	5.2	8	14
ESD055	5.5	8	14
ESD06	6	10	16
ESD062	6.2	10	16
ESD08	8	12	20
ESD082	8.2	12	20
ESD10	10	14	22
ESD102	10.2	14	22
ESD105	10.5	14	22	
ESD12	12	16	22	
ESD125	12.5	16	22	
ESD14	14	18	24	
ESD16	16	20	26	
ESD18	18	22	28	

To Order: Specify the ESD prefix with the inner diameter (D), and length. Ex. ESD035L175.

<p>ALTERNATIVE CONFIGURATIONS AVAILABLE</p>	<ul style="list-style-type: none"> Sleeves can be ordered with the Black Nitride treatment for better performance. To order, specify "-BN" at the end of the catalog number. Ex. ESD08L250-BN. To achieve longer lengths, use Sleeve Extensions on page A-17. Mold-Ready Sleeves can be supplied cut-to-length, keyed, and/or engraved at a standard price and delivery. Refer to page A-20 and procomps.com/mold-ready for more information. Made-to-order Sleeves can be quoted using the templates at procomps.com.
--	---