


SLIDE RETAINERS BASES & BUSHINGS




SRT BASES

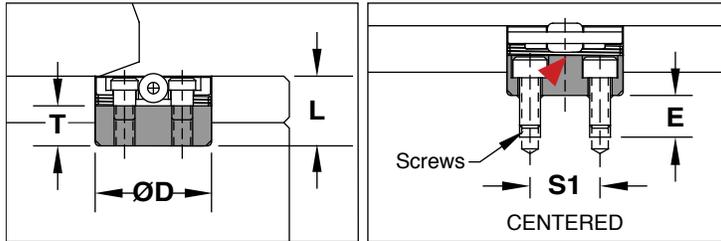

SRT Bases enable the Slide Retainer to be installed in a hardened plate when mold base steel is aluminum, for example. (SRTBA-10 shown in graphics.)

SRT BUSHINGS

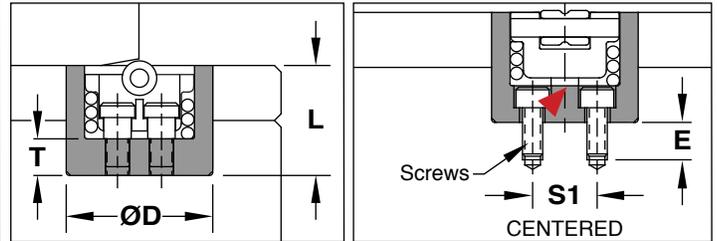

SRT Bushings accept the standard Slide Retainer to allow for installation in soft materials (aluminum, copper bronze, etc). Also, the SRT Bushing can provide hardened guidance against wear rather than bearing on a bronze wear plate. (SRTBU-30 shown in graphics.)

Inch Standard

Base: **M** D-2 **H** 58-60 HRC

Bushing: **M** D-2 **H** 58-60 HRC

CATALOG NUMBER	D +.005 -.000	L ±.001	S1 ±.01	T	E REF	SCREWS (2)	USE WITH	CATALOG NUMBER	D +.001 -.000	L +.002 -.000	S1 ±.01	T	E REF	SCREWS (2)
SRTBA-10	.625	.375	.37	.215	.220	#4-40 x 5/16	SRT-02	SRTBU-10	.875	.375	.37	.215	.220	#4-40 x 5/16
							SRT-04							
							SRT-10							
SRTBA-30	.750	.750	.44	.250	.280	#6-32 x 3/8	SRT-20	SRTBU-30	1.000	.750	.44	.250	.280	#6-32 x 3/8
							SRT-30							
SRTBA-80	.875	1.000	.50	.250	.280	#6-32 x 3/8	SRT-50	SRTBU-80	1.125	1.000	.50	.250	.280	#6-32 x 3/8
SRTBA-75	1.125	1.300	.62	.443	.380	#10-32 x 1/2	SRT-40	SRTBU-75	1.500	1.300	.62	.443	.380	#10-32 x 1/2
							SRT-60							
							SRT-75							

Metric Standard

Base: **M** D-2 **H** 58-60 HRC

Bushing: **M** D-2 **H** 58-60 HRC

CATALOG NUMBER	D +.1 -.0	L ±.03	S1 ±.25	T	E REF	SCREWS (2)	USE WITH	CATALOG NUMBER	D +.03 -.00	L +.05 -.00	S1 ±.25	T	E REF	SCREWS (2)
SRTMBA-04	15.9	9.56	8	5.50	5.30	M2.5-.45 x 8	SRTM-01	SRTMBU-04	22.3	9.50	8	5.44	5.35	M2.5-.45 x 8
							SRTM-02							
							SRTM-04							
SRTMBA-13	19.1	19.05	11	6.35	4.95	M3-.5 x 8	SRTM-09	SRTMBU-13	25.4	19.10	11	6.35	4.95	M3-.5 x 8
							SRTM-13							
SRTMBA-36	22.3	25.40	13	6.35	4.95	M3-.5 x 8	SRTM-22	SRTMBU-36	28.5	25.40	13	6.35	4.95	M3-.5 x 8
SRTMBA-34	28.2	33.00	16	11.25	9.90	M5-.8 x 12	SRTM-18	SRTMBU-34	37.0	33.00	16	11.25	9.90	M5-.8 x 12
							SRTM-28							
							SRTM-34							

▶ CAD insertion point