




SOCKET CONNECTORS

KEYED CONNECT SERIES

- Eliminate in/out connection mistakes, using the keyed plugs for all inlets
- Enables faster changeovers
- Pressure to 200 psi
- Max temp = 400° F
- Includes Blue Safety Clip
- Use with Keyed Connector Plugs sold on opposite page or Keyed Extension Plugs shown on page E-23.

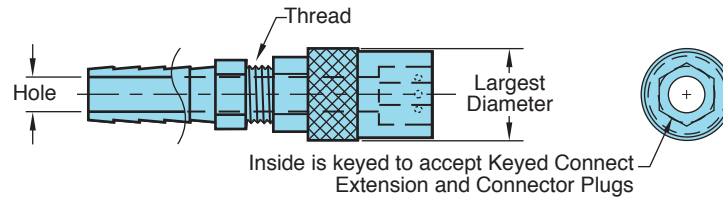

M Brass with Stainless Steel Bearings and Silicone Seals

▶ CAD insertion point

		200 SERIES (1/4" Hole)			300 SERIES (3/8" Hole)			500 SERIES (1/2" Hole)		
		CATALOG NUMBER	Hose ID	Largest Diameter	CATALOG NUMBER	Hose ID	Largest Diameter	CATALOG NUMBER	Hose ID	Largest Diameter
S T R A I G H T		SC204-K	1/4	.71	SC306-K	3/8	.97	SC504-K	1/2	1.21
		SC205-K	5/16	.71	SC308-K	1/2	.97	SC506-K	3/4	1.21
		SC206-K	3/8	.71	-	-	-	-	-	-
90° S T E M		SC214-K	1/4	.71	SC316-K	3/8	.97	SC514-K	1/2	1.21
		SC215-K	5/16	.71	SC318-K	1/2	.97	SC516-K	3/4	1.21
		SC216-K	3/8	.71						
45° S T E M		SC224-K	1/4	.71	SC326-K	3/8	.97	SC524-K	1/2	1.21
		SC225-K	5/16	.71	SC328-K	1/2	.97	SC526-K	3/4	1.21
		SC226-K	3/8	.71	-	-	-	-	-	-
Socket Body Only		CATALOG NUMBER	Thread		CATALOG NUMBER	Thread		CATALOG NUMBER	Thread	
		SC200B-K	1/8		SC300B-K	1/4		SC500B-K	1/2	
		SC200B-4-K	1/4		SC300B-4-K	3/8				
Replacement Seals: Silicone (Red)		SC200S			SC300S			SC500S		
Replacement Seals: Viton (Black)		SC200S-V			SC300S-V			SC500S-V		

Note: 200 and 300 Series Straight Socket Connectors are manufactured from a single piece, not assembled as shown.

Alternative configurations and materials available:

- To order Socket Connectors or Bodies with barbs for Push-Lok® hose, specify "-PL" before the -K within the catalog number.
Ex. SC326-PL-K or SC306-PL-K

Note: Clips are designed for the Keyed Connect Series of Socket Connectors. They can be used on the standard or locking Socket Connectors but will be for color designation only.

CATALOG NUMBER	Color	Series
SC200-BL	Blue	200
SC300-BL		300
SC500-BL		500
SC200-R	Red	200
SC300-R		300
SC500-R		500

SAFETY CLIPS

