




SOCKET CONNECTORS STANDARD SERIES

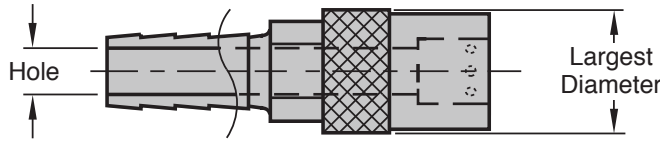

- Pressure to 200 psi
- Max temp = 400°F
- Use with standard Connector Plugs sold on opposite page or Extension Plugs sold on page E-22.

M Brass with Stainless Steel Bearings and Silicone Seals

		200 SERIES (1/4" HOLE)			300 SERIES (3/8" HOLE)			500 SERIES (1/2" Hole)		
		CATALOG NUMBER	HOSE ID	LARGEST DIA.	CATALOG NUMBER	HOSE ID	LARGEST DIA.	CATALOG NUMBER	HOSE ID	LARGEST DIA.
STRAIGHT		SC204	1/4	.71	SC306	3/8	.97	SC504	1/2	1.21
		SC205	5/16	.71	SC308	1/2	.97	SC506	3/4	1.21
		SC206	3/8	.71	-	-	-	-	-	-
90° STEM		SC214	1/4	.71	SC316	3/8	.97	SC514	1/2	1.21
		SC215	5/16	.71	SC318	1/2	.97	SC516	3/4	1.21
		SC216	3/8	.71	-	-	-	-	-	-
45° STEM		SC224	1/4	.71	SC326	3/8	.97	SC524	1/2	1.21
		SC225	5/16	.71	SC328	1/2	.97	SC526	3/4	1.21
		SC226	3/8	.71	-	-	-	-	-	-
Socket Body Only		CATALOG NUMBER		THREAD	CATALOG NUMBER		THREAD	CATALOG NUMBER		THREAD
Straight		SC200B		1/8	SC300B		1/4	SC500B		1/2
90° Degree		SC200B-4		1/4	SC300B-4		3/8	-		-
		SC200B-90		1/8	SC300B-90		1/4	SC500B-90		1/2
Replacement Seals: Silicone (Red)		SC200S			SC300S			SC500S		
Replacement Seals: Viton (Black)		SC200S-V			SC300S-V			SC500S-V		

ALTERNATIVE CONFIGURATIONS AVAILABLE

- To order valved style Socket Connectors or Bodies (shown at right), add "-V" to the end of the catalog number. Ex. SC316-V
- To order Socket Connectors or Bodies with barbs for Push-Lok® hose, specify "-PL" at the end of the catalog number. Ex. SC326-PL or SC306-V-PL
- Note: Valved versions (-V or -V-PL) are not available in the 500 series.



STANDARD SERIES: LOCKING CONNECTORS

This system provides a positive locking connection to Extension or Connector Plugs. Connect and twist to lock the sleeve into place.



To Order:

- Specify "-L" as the suffix to the standard items in the chart above. Examples:
 SC205-L (Standard Barbs)
 SC300B-L (Body)
 SC326-PL-L (Push-Lok Barbs)
 Note: Not available in the Valved versions.

