


PISTON TUBES



M Tube: High Flow Stainless Steel, Pipe Plug: Stainless Steel ▶ CAD insertion point

P NPT	TUBE O.D.	TUBE I.D.	12" LENGTH	18" LENGTH	24" LENGTH	36" LENGTH	48" LENGTH
1/16	.072	.060	PT06-078L12	PT06-078L18	PT06-078L24	PT06-078L36	PT06-078L48
	.090	.076	PT06-094L12	PT06-094L18	PT06-094L24	PT06-094L36	PT06-094L48
	.109	.095	PT06-109L12	PT06-109L18	PT06-109L24	PT06-109L36	PT06-109L48
	.125	.109	PT06-125L12	PT06-125L18	PT06-125L24	PT06-125L36	PT06-125L48
	.187	.167	PT06-187L12	PT06-187L18	PT06-187L24	PT06-187L36	PT06-187L48
1/8	.125	.109	PT12-125L12	PT12-125L18	PT12-125L24	PT12-125L36	PT12-125L48
	.187	.167	PT12-187L12	PT12-187L18	PT12-187L24	PT12-187L36	PT12-187L48
	.250	.230	PT12-250L12	PT12-250L18	PT12-250L24	PT12-250L36	PT12-250L48
1/4	.187	.167	PT25-187L12	PT25-187L18	PT25-187L24	PT25-187L36	PT25-187L48
	.250	.230	PT25-250L12	PT25-250L18	PT25-250L24	PT25-250L36	PT25-250L48
	.312	.288	PT25-312L12	PT25-312L18	PT25-312L24	PT25-312L36	PT25-312L48
3/8	.312	.288	PT37-312L12	PT37-312L18	PT37-312L24	PT37-312L36	PT37-312L48
	.365	.340	PT37-375L12	PT37-375L18	PT37-375L24	PT37-375L36	PT37-375L48
1/2	.427	.397	PT37-437L12	PT37-437L18	PT37-437L24	PT37-437L36	PT37-437L48
	.365	.340	PT50-375L12	PT50-375L18	PT50-375L24	PT50-375L36	PT50-375L48
	.427	.397	PT50-437L12	PT50-437L18	PT50-437L24	PT50-437L36	PT50-437L48
3/4	.500	.444	PT50-500L12	PT50-500L18	PT50-500L24	PT50-500L36	PT50-500L48
	.427	.397	PT75-437L12	PT75-437L18	PT75-437L24	PT75-437L36	PT75-437L48
	.500	.444	PT75-500L12	PT75-500L18	PT75-500L24	PT75-500L36	PT75-500L48
	.625	.569	PT75-625L12	PT75-625L18	PT75-625L24	PT75-625L36	PT75-625L48

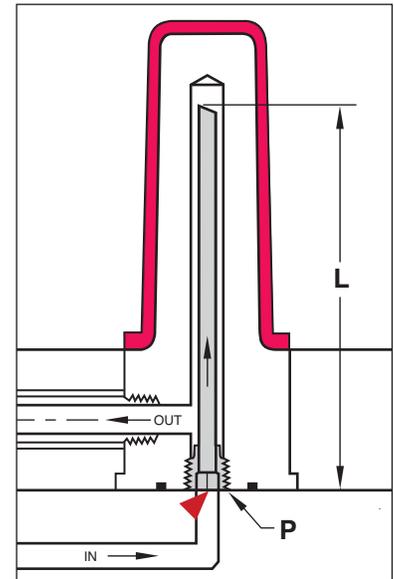

ALTERNATIVE CONFIGURATIONS AVAILABLE

- For Piston Tubes with a brass plug, specify "B" at the end of the catalog numbers for all sizes. Ex. PT25-250L12B.
- Longer lengths and Piston Tubes cut to length are available. Contact Customer Service for pricing and delivery.

BRASS TUBES



M Half-Hard Tempered Brass

TUBE O.D.	TUBE I.D.	THREAD SIZE	THREAD LENGTH	12" LENGTH	18" LENGTH	24" LENGTH	36" LENGTH
.125	.061	#5-44	.187	T125L12	T125L18	T125L24	T125L36
.187	.123	#10-32	.187	T187L12	T187L18	T187L24	T187L36
.250	.170	1/4-28	.250	T250L12	T250L18	T250L24	T250L36
.312	.210	5/16-24	.312	T312L12	T312L18	T312L24	T312L36
.375	.273	3/8-24	.375	T375L12	T375L18	T375L24	T375L36
.437	.307	7/16-20	.437	T437L12	T437L18	T437L24	T437L36
.625	.495	5/8-18	.625	T625L12	T625L18	T625L24	T625L36

ALTERNATIVE CONFIGURATIONS AVAILABLE

- To order tubes with both ends threaded, add a "T" to the end of the catalog number. Ex. T125L12T
- Tubing is available in stainless steel and threaded both ends. To order, specify "-SST" in the catalog number above. Ex. T125L12-SST. (Note: Not available in 5/8 OD.)
- Longer length tubes or tubes cut to length can be ordered by contacting Customer Service.