
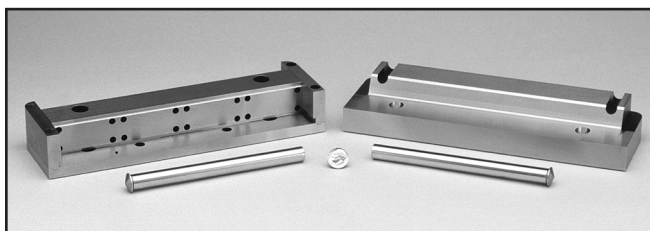
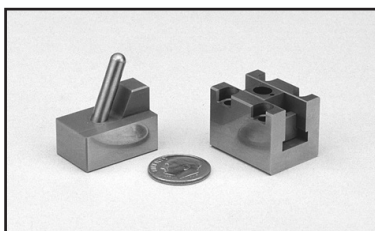


VERSA-SLIDE® SELECTION GUIDE

Progressive's Versa-Slide assemblies, a product line acquired from Omni Mold Systems®, offer a range of pre-engineered, off-the-shelf side actions.

- Wide range of sizes and travels.
- Slide Faces are available for all assemblies, sold separately.
- For application assistance, please contact tech@procomps.com.

PART NAME	MATERIAL
Slide	H-13, 48-50 HRC
Wedge	S-7, 54-56 HRC
Guide Shoe (10 Series) Guides	S-7, 54-56 HRC
Wear Plate	S-7, 54-56 HRC
Cam Pin: CP-10-A Cam Pin: CP-20 & CP-30	H-13, 50-52 HRC H-13, Nitrided to 65-70 HRC

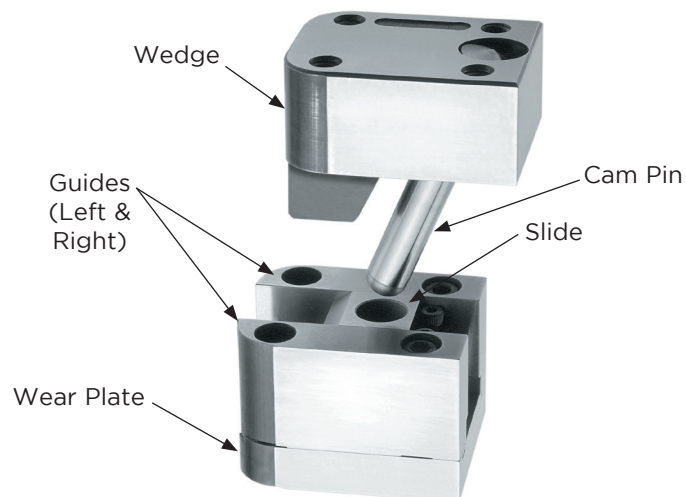

CAM TRAVEL RANGE	OVERALL WIDTH (W) INCLUDING GRIND STOCK	SLIDE WIDTH (SW)	SLIDE HEIGHT (SH)	VERSA-SLIDE SERIES	PAGE NUMBER
.250	.760 - 1.760	.320-1.320	.500	10 Series	G-15
.500 - .600	1.510	.625	.460 - 1.460	20 Series	G-16
.500 - 1.800	2.260	1.375	.640 - 1.640	25 Series	G-17
.500 - 1.800	2.948	2.063	.640 - 1.640	30 Series	G-17
.500 - 1.800	4.073	3.188	.640 - 1.640	40 Series	G-18
.500 - 1.800	5.255	4.375	.640 - 1.640	45 Series	G-19
.500 - 1.800	6.510	5.624	.640 - 1.640	50 Series	G-20 & G-21
.500 - 1.800	8.005	7.124	.640 - 1.640	55 Series	G-20 & G-21
.500 - 1.800	9.635	8.749	.640 - 1.640	60 Series	G-20 & G-21

APPLICATION GUIDELINES

- Select the Versa-Slide based on the detail width and the required travel.
- Refer to individual pages for detailed specifications.
- Slide Faces are sold separately on page G-22.
- Machining instructions can be found on page G-23.