


EJECTOR PINS

THROUGH-HARD PINS: STRAIGHT - INCH STANDARD



D Tolerances

Ø3/64 - Ø7/16	-.0004 -.0007
Ø15/32 and Up	-.0004 -.0009

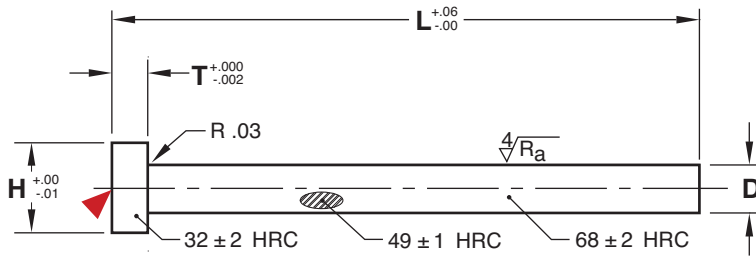

M H-13 **H** Core: 48-50 HRC, Surface: 66-70 HRC

▶ CAD insertion point

D Nominal Pin Diameter	H	T	L=6"		L=10"		L=14"		L=18"		L=25"		L=39"		L=50"	
			D Standard	D Standard	D .005 Oversize	D Standard	D .005 Oversize	D Standard	D .005 Oversize	D Standard	D .005 Oversize	D Standard	D .005 Oversize	D Standard	D Standard	D Standard
1/32	.25	.125	EP031L6	—	—	—	—	—	—	—	—	—	—	—	—	—
3/64	.25	.125	EP047L6	—	—	—	—	—	—	—	—	—	—	—	—	—
1/16	.25	.125	EP062L6	EP062L10	—	—	—	—	—	—	—	—	—	—	—	—
5/64	.25	.125	EP078L6	EP078L10	—	—	—	—	—	—	—	—	—	—	—	—
3/32	.25	.125	EP094L6	EP094L10	—	—	—	—	—	—	—	—	—	—	—	—
7/64	.25	.125	EP109L6	EP109L10	—	—	—	—	—	—	—	—	—	—	—	—
1/8	.25	.125	EP125L6	EP125L10	EP130L10	EP125L14	EP130L14	EP125L18	—	EP125L25	—	—	—	—	—	—
9/64	.25	.125	—	EP141L10	—	EP141L14	EP146L14	—	—	—	—	—	—	—	—	—
5/32	.28	.156	EP156L6	EP156L10	EP161L10	EP156L14	EP161L14	EP156L18	—	EP156L25	—	—	—	—	—	—
11/64	.34	.187	—	EP172L10	—	EP172L14	EP177L14	—	—	—	—	—	—	—	—	—
3/16	.37	.187	EP187L6	EP187L10	EP192L10	EP187L14	EP192L14	EP187L18	—	EP187L25	—	—	EP187L39	EP187L50	—	—
13/64	.37	.187	—	EP203L10	—	EP203L14	EP208L14	—	—	—	—	—	—	—	—	—
7/32	.40	.187	EP219L6	EP219L10	EP224L10	EP219L14	EP224L14	—	—	EP219L25	—	—	—	—	—	—
15/64	.40	.187	—	EP234L10	—	EP234L14	EP239L14	—	—	—	—	—	—	—	—	—
1/4	.43	.187	EP250L6	EP250L10	EP255L10	EP250L14	EP255L14	EP250L18	EP255L18	EP250L25	—	—	EP250L39	EP250L50	—	—
17/64	.43	.250	—	EP266L10	—	EP266L14	EP271L14	—	—	EP266L25	—	—	—	—	—	—
9/32	.43	.250	EP281L6	EP281L10	EP286L10	EP281L14	EP286L14	EP281L18	EP286L18	EP281L25	—	—	—	—	—	—
19/64	.50	.250	—	EP297L10	—	EP297L14	EP302L14	—	—	—	—	—	—	—	—	—
5/16	.50	.250	EP312L6	EP312L10	EP317L10	EP312L14	EP317L14	EP312L18	EP317L18	EP312L25	EP317L25	EP312L39	EP312L50	—	—	—
21/64	.56	.250	—	EP328L10	—	EP328L14	EP333L14	—	—	EP328L25	—	—	—	—	—	—
11/32	.56	.250	EP344L6	EP344L10	EP349L10	EP344L14	EP349L14	—	—	EP344L25	—	—	—	—	—	—
23/64	.62	.250	—	EP359L10	—	EP359L14	EP364L14	—	—	—	—	—	—	—	—	—
3/8	.62	.250	EP375L6	EP375L10	EP380L10	EP375L14	EP380L14	EP375L18	EP380L18	EP375L25	EP380L25	EP375L39	EP375L50	—	—	—
25/64	.62	.250	—	—	—	EP390L14	EP395L14	EP390L18	—	—	EP395L25	—	—	—	—	—
13/32	.68	.250	EP406L6	EP406L10	EP411L10	EP406L14	EP411L14	EP406L18	—	EP406L25	—	—	—	—	—	—
27/64	.68	.250	—	—	—	EP422L14	EP427L14	—	—	—	—	—	—	—	—	—
7/16	.68	.250	EP437L6	EP437L10	EP442L10	EP437L14	EP442L14	EP437L18	—	EP437L25	—	—	EP437L39	EP437L50	—	—
29/64	.68	.250	—	—	—	EP453L14	EP458L14	—	—	—	—	—	—	—	—	—
15/32	.75	.250	—	EP469L10	EP474L10	—	EP474L14	EP469L18	—	EP469L25	—	—	—	—	—	—
31/64	.75	.250	—	—	—	EP484L14	EP489L14	—	—	—	—	—	—	—	—	—
1/2	.75	.250	EP500L6	EP500L10	EP505L10	EP500L14	EP505L14	EP500L18	—	EP500L25	EP505L25	EP500L39	EP500L50	—	—	—
17/32	.75	.250	—	—	—	EP531L14	EP536L14	—	—	EP531L25	—	—	—	—	—	—
9/16	.81	.250	EP562L6	EP562L10	—	EP562L14	—	EP562L18	—	EP562L25	—	—	EP562L39	EP562L50	—	—
5/8	.87	.250	EP625L6	EP625L10	—	EP625L14	—	EP625L18	—	EP625L25	—	—	EP625L39	EP625L50	—	—
11/16	.93	.250	—	EP687L10	—	—	—	EP687L18	—	EP687L25	—	—	—	—	—	—
3/4	1.00	.250	EP750L6	EP750L10	—	EP750L14	—	EP750L18	—	EP750L25	—	—	EP750L39	EP750L50	—	—
7/8	1.12	.250	—	EP875L10	—	EP875L14	—	EP875L18	—	EP875L25	—	—	EP875L39	EP875L50	—	—
1	1.25	.250	EP1000L6	EP1000L10	—	EP1000L14	—	EP1000L18	—	EP1000L25	—	—	EP1000L39	EP1000L50	—	—

To order pins with the keys tangent to the diameter, add "-K" to the end of the catalog number.
 For Ejector Pins cut-to-length, with non-tangent keys, or Black Nitride, refer to page A-1.

